



## V - H O O K S , S - H O O K S , C - H O O K S A N D C V - H O O K S

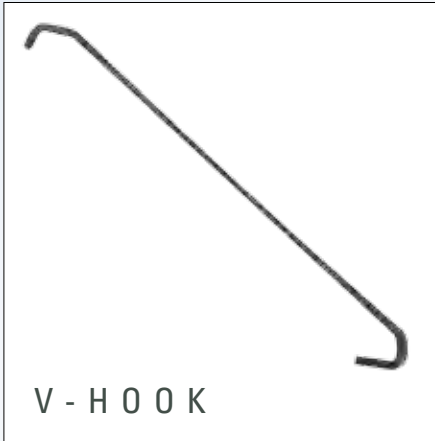


- Solid metal to metal contact
- Consistent grounding
- Minimal hook mark
- High load capacity (see load chart)
- Low minimums – 1 bag
- Custom hook samples in 2 days
- High strength spring steel
- Custom angles available
- Custom lengths available
- Custom shapes available

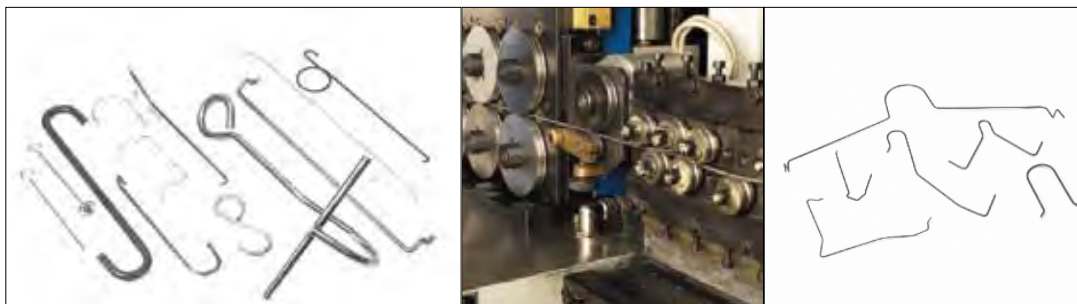


# H O O K S

## V - H O O K S , S - H O O K S , C - H O O K S A N D C V - H O O K S



WIRE DIAMETER



WIRE DIAMETER

V-HOOK	S-HOOK	C-HOOK	CV-HOOK	Wire Dia. (in) (mm)	Length (in) (mm)	Angle	Qty. Per Bag
V-044-2			CV-044-2	0.044 1.12	2 50.80		1000
V-062-2.5			CV-062-2	0.062 1.57	2.500 63.50		1000
V-062-2.5-90				0.062 1.57	2.500 63.50	90	1000
V-076-2.5			CV-076-2	0.076 1.93	2.500 63.50		1000
V-044-3	S-044-3	C-044-3	CV-044-3	0.044 1.12	3 76.20		1000
V-062-3	S-062-3	C-062-3		0.062 1.57	3 76.20		1000
V-062-3-90		C-062-3-90		0.062 1.57	3 76.20	90	1000
V-076-3	S-076-3	C-076-3		0.076 1.93	3 76.20		1000
V-044-4		C-044-4		0.044 1.12	4 101.60		1000
V-062-4	S-062-4	C-062-4	CV-062-4	0.062 1.57	4 101.60		1000
V-062-4-90		C-062-4-90		0.062 1.57	4 101.60	90	1000
V-076-4	S-076-4	C-076-4	CV-076-4	0.076 1.93	4 101.60		1000
V-076-4-90				0.076 1.93	4 101.60	90	1000
V-120-4			CV-120-4	0.120 3.05	4 101.60		1000
V-120-4-90				0.120 3.05	4 101.60	90	1000
V-180-4			CV-180-4	0.180 4.57	4 101.60		1000
V-180-5	S-180-5			0.180 4.57	5 127.00		1000
V-062-6	S-062-6	C-062-6	CV-062-6	0.062 1.57	6 152.40		1000
V-062-6-90				0.062 1.57	6 152.40	90	1000
V-076-6	S-076-6	C-076-6	CV-076-6	0.076 1.93	6 152.40		1000
V-076-6-90				0.076 1.93	6 152.40	90	1000
V-120-6	S-120-6	C-120-6	CV-120-6	0.120 3.05	6 152.40		1000
V-076-7			CV-076-7	0.076 1.93	7 177.80		1000
V-076-7-90				0.076 1.93	7 177.80	90	1000
V-120-7			CV-120-7	0.120 3.05	7 177.80		1000
V-120-7-90				0.120 3.05	7 177.80	90	1000
			CV-180-7	0.180 4.57	7 177.80		500
V-076-8	S-076-8	C-076-8	CV-076-8	0.076 1.93	8 203.20		500

# V-HOOKS, S-HOOKS, C-HOOKS AND CV-HOOKS

V-HOOK	S-HOOK	C-HOOK	CV-HOOK	Wire Dia. (in) (mm)	Length (in) (mm)	Angle	Qty. Per Bag
V-076-8-90				0.076 1.93	8 203.20	90	500
V-120-8	S-120-8	C-120-8	CV-120-8	0.120 3.05	8 203.20		500
V-120-8-90				0.120 3.05	8 203.20	90	500
V-180-8	S-180-8	C-180-8	CV-180-8	0.180 4.57	8 203.20		250
V-076-10	S-076-10	C-076-10		0.076 1.93	10 254.00		500
V-120-10	S-120-10	C-120-10	CV-120-10	0.120 3.05	10 254.00		500
V-120-10-90				0.120 3.05	10 254.00	90	500
V-180-10	S-180-10	C-180-10		0.180 4.57	10 254.00		250
V-076-12				0.076 1.93	12 304.80		500
V-076-12-90				0.076 1.93	12 304.80	90	500
V-120-12	S-120-12	C-120-12	CV-120-12	0.120 3.05	12 304.80		500
V-120-12-90				0.120 3.05	12 304.80	90	500
V-180-12	S-180-12	C-180-12		0.180 4.57	12 304.80		250
V-076-14				0.076 1.93	14 355.60		500
V-076-14-90				0.076 1.93	14 355.60	90	500
V-120-14	S-120-14	C-120-14	CV-120-14	0.120 3.05	14 355.60		500
V-180-14	S-180-14	C-180-14		0.180 4.57	14 355.60		250
			CV-180-16	0.180 4.57	16 406.40		250
V-076-18				0.076 1.93	18 457.20		500
V-120-18				0.120 3.05	18 457.20		250
V-120-18-90				0.120 3.05	18 457.20	90	250
V-180-18			CV-180-18	0.180 4.57	18 457.20		250
V-180-18-90				0.180 4.57	18 457.20	90	250
V-076-24				0.076 1.93	24 609.60		500
V-120-24	S-120-24	C-120-24		0.120 3.05	24 609.60		250
V-180-24	S-180-24		CV-180-24	0.180 4.57	24 609.60		250
V-180-24-90				0.180 4.57	24 609.60	90	250
V-120-32				0.120 3.05	32 812.80		250
V-180-32				0.180 4.57	32 812.80		250

